


## PNP Transistors

### 2SA1576A

#### ■ Features

- Excellent  $h_{FE}$  linearity
- Complements the 2SC4081

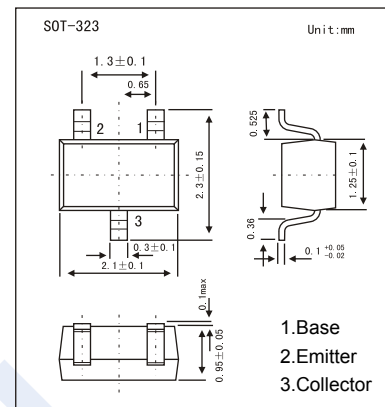

#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	-60	V
Collector - Emitter Voltage	$V_{CE0}$	-50	
Emitter - Base Voltage	$V_{EB0}$	-6	
Collector Current - Continuous	$I_C$	-150	mA
Collector Power Dissipation	$P_C$	200	mW
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature range	$T_{stg}$	-55 to 150	

#### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	$V_{CB0}$	$I_C = -50 \mu\text{A}, I_E = 0$	-60			V
Collector- emitter breakdown voltage	$V_{CE0}$	$I_C = -1 \text{mA}, I_B = 0$	-50			
Emitter - base breakdown voltage	$V_{EB0}$	$I_E = -50 \mu\text{A}, I_C = 0$	-6			
Collector-base cut-off current	$I_{CB0}$	$V_{CB} = -60 \text{V}, I_E = 0$			-0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EB0}$	$V_{EB} = -6 \text{V}, I_C = 0$			-0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -50 \text{mA}, I_B = -5 \text{mA}$			-0.5	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = -50 \text{mA}, I_B = -5 \text{mA}$			-1.2	
DC current gain	$h_{FE}$	$V_{CE} = -6 \text{V}, I_C = -1 \text{mA}$	120		560	
Collector output capacitance	$C_{ob}$	$V_{CB} = -12 \text{V}, I_E = 0, f = 1 \text{MHz}$		4	5	pF
Transition frequency	$f_T$	$V_{CE} = -12 \text{V}, I_C = -2 \text{mA}, f = 30 \text{MHz}$		140		MHz

#### ■ Classification of $h_{FE}$

Type	2SA1576A-Q	2SA1576A-R	2SA1576A-S
Range	120-270	180-390	270-560
Marking	FQ	FR	FS

# PNP Transistors

## 2SA1576A

■ Typical Characteristics

