
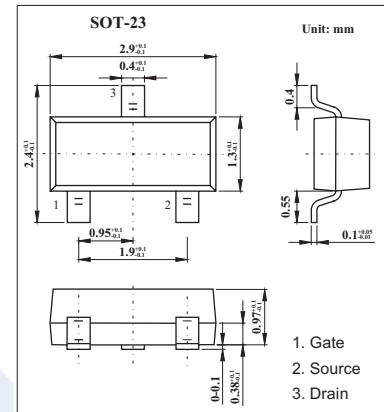


N-Channel Enhancement Mode Field Effect Transistor KO3402(AO3402)

■ Features

- $V_{BS} (V) = 30V$
- $I_D = 4 A$
- $R_{DS(ON)} < 55m\Omega$ ($V_{GS} = 10V$)
- $R_{DS(ON)} < 70m\Omega$ ($V_{GS} = 4.5V$)
- $R_{DS(ON)} < 110m\Omega$ ($V_{GS} = 2.5V$)



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{BS}	30	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	$T_A=25^\circ C$	4
		$T_A=70^\circ C$	3.4
Pulsed Drain Current	I_{DM}	15	A
Power Dissipation	P_D	$T_A=25^\circ C$	1.4
		$T_A=70^\circ C$	1
Thermal Resistance.Junction-to-Ambient	$R_{\theta JA}$	125	$^\circ C/W$
Thermal Resistance.Junction-to-Case	$R_{\theta JC}$	80	$^\circ C/W$
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ C$

K03402(AO3402)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =250 μA, V _{GS} =0V	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =24V, V _{GS} =0V			1	μA
		V _{DS} =24V, V _{GS} =0V, T _J =55°C			5	
Gate-Body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250 μA	0.6	1	1.4	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =4A		45	55	mΩ
		V _{GS} =10V, I _D =4A T _J =125°C		66	80	
		V _{GS} =4.5V, I _D =3A		55	70	mΩ
		V _{GS} =2.5V, I _D =2A		83	110	mΩ
On state drain current	I _{D(ON)}	V _{GS} =4.5V, V _{DS} =5V	10			A
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =4A		8		S
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =15V, f=1MHz		390		pF
Output Capacitance	C _{oss}			54.5		pF
Reverse Transfer Capacitance	C _{rss}			41		pF
Gate resistance	R _g	V _{GS} =0V, V _{DS} =0V, f=1MHz		3		Ω
Total Gate Charge	Q _g	V _{GS} =4.5V, V _{DS} =15V, I _D =-4A		4.34		nC
Gate Source Charge	Q _{gs}			0.6		nC
Gate Drain Charge	Q _{gd}			1.38		nC
Turn-On DelayTime	t _{D(on)}	V _{GS} =10V, V _{DS} =15V, R _L =3.75 Ω, R _{GEN} =6 Ω		3.3		ns
Turn-On Rise Time	t _r			1		ns
Turn-Off DelayTime	t _{D(off)}			21.7		ns
Turn-Off Fall Time	t _f			2.1		ns
Body Diode Reverse Recovery Time	t _{rr}		I _F =4A, di/dt=100A/μs		12	
Body Diode Reverse Recovery Charge	Q _{rr}	I _F =4A, di/dt=100A/μs		6.3		nC
Maximum Body-Diode Continuous Current	I _S				2.5	A
Diode Forward Voltage	V _{SD}	I _S =1A, V _{GS} =0V		0.8	1	V