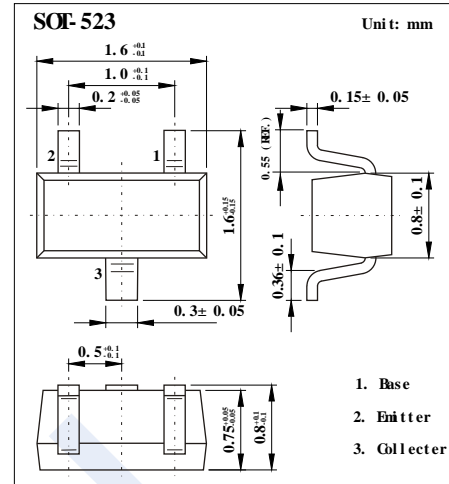


NPN Transistors

MMBT2222AT (KMBT2222AT)

■ Features

- Small Package
- Complementary to MMBT2907AT

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	75	V
Collector - Emitter Voltage	V_{CE0}	40	
Emitter - Base Voltage	V_{EB0}	6	
Collector Current - Continuous	I_c	600	mA
Collector Power Dissipation	P_c	150	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to 150	

NPN Transistors

MMBT2222AT (KMBT2222AT)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CB0}	I _c = 100 μA, I _E = 0	75			V
Collector- emitter breakdown voltage	V _{CE0}	I _c = 10 mA, I _B = 0	40			
Emitter - base breakdown voltage	V _{EB0}	I _E = 100 μA, I _C = 0	6			
Collector-base cut-off current	I _{CBO}	V _{CB} = 75 V, I _E = 0			100	nA
Collector cut-off current	I _{CEX}	V _{CE} = 60 V, V _{EB(off)} =3V			100	
Emitter cut-off current	I _{EBO}	V _{EB} = 6V, I _C =0			100	
Collector-emitter saturation voltage	V _{CE(sat)}	I _c =150 mA, I _B =15mA			0.3	V
		I _c = 500 mA, I _B = 50mA			1	
Base - emitter saturation voltage	V _{BE(sat)}	I _c =150 mA, I _B =15mA			1.2	
		I _c = 500 mA, I _B = 50mA			2	
DC current gain	h _{FE(1)}	V _{CE} = 10V, I _c = 0.1mA	35			
	h _{FE(2)}	V _{CE} = 10V, I _c = 1mA	50			
	h _{FE(3)}	V _{CE} = 10V, I _c = 10mA	75			
	h _{FE(4)}	V _{CE} = 10V, I _c = 150mA	100		300	
	h _{FE(5)}	V _{CE} = 10V, I _c = 500mA	40			
Delay time	t _d	V _{CC} =30V, V _{BE(off)} =-0.5V			10	nS
Rise time	t _r	I _c =150mA, I _{B1} =15mA			25	
Storage time	t _s	V _{CC} =30V, I _c =150mA, I _{B1} =I _{B2} =15mA			225	
Fall time	t _f				60	
Collector output capacitance	C _{ob}	V _{CB} = 10V, I _E = 0, f=1MHz			8	pF
Transition frequency	f _T	V _{CE} = 20V, I _c = 20mA, f=100MHz	300			MHz

■ Marking

Marking	1P
---------	----